

Pavestone Pointfix is a superior two pack multi-use jointing and repair compound. One pack contains epoxy resin within the compound and the other epoxy hardener. Once thoroughly mixed the jointing compound cures to create a permanent hard jointing material.

There are no liquids or powders to measure and mix in, so mixing and applying Pavestone Pointfix is much cleaner and easier than traditional sand and cement mortar. Pavestone Pointfix is specifically designed for pointing and infilling between many types of surfaces including concrete paving, natural stone paving, brickwork and stonework.

If it rains, or is forecast to rain, completing a traditional pointing project can become a major problem. Pavestone Pointfix eliminates this problem as it can be applied even when the paving or bricks are wet and you can even carry on pointing when it rains.

Available in five shades to perfectly complement any paving colour. The 50/50 mixing ratio means you only need to mix what is needed, cutting down on waste.

Features:

No specialist tools

Fast application

Simple to use

No waste - only mix what you need

Can be applied to wet surfaces even when raining

Prevents weed growth

Quick curing

Cost effective

Pet friendly.

Colours:



Pavestone Pointfix is manufactured from natural products, and slight shade variations may occur between production batches. Pavestone Pointfix is resistant to deterioration caused by weather, UV and chemicals.

Application

Before jointing ensure that all joint voids are completely free from dirt and debris. Joint widths should be a minimum of 6mm wide and be at least 24mm deep for a perfect joint.

It is essential that the paving has been correctly installed and that the paving elements have been fully bedded on a class 1 mortar with no voids.

In a suitable clean container mix together equal proportions from both packs until uniform in colour.

Tip the mixture onto the area to be pointed, turning the mix over again to make sure both bags have been mixed together thoroughly.

Brush into the joints, compact down with a jointing iron, top up and compact down again.

Brush off any excess product and wipe around the joints with a damp sponge to remove any remaining residue.

Continued on next page



Watch our 'How To' mix & apply Pointfix video. Click on the Play button!

Application (continued)


Leave to cure for 12 hours at 15-20°C. Note, curing times will be longer at lower temperatures and faster at higher temperatures.

Do not apply if surface temperatures are below 5°C or above 25°C.

Not suitable for porcelain or granite.

With chamfered paving, always leave at least 6mm joint at the bottom.

Create a gap under each paver to ensure the joint has a good key to the paving.

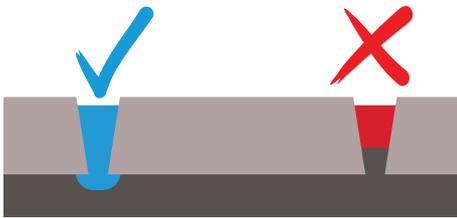

FOR FULL INSTRUCTIONS, SEE THE INSTALLATION SECTION ON OUR WEBSITE OR WATCH THE 'HOW TO' VIDEO

Coverage

Paving size/mm)	Example 10mm Joint Width, 24mm deep
600 x 600	7.5m ²
600 x 450	6.3m ²
450 x 450	5.4m ²
300 x 450	4.5m ²
300 x 300	3.6m ²

All quoted coverages are approximates.

Cleaning

Wash tools in clean water immediately after use.

Shelf Life

Pavestone Pointfix can be stored for up to 24 months if unopened and 12 months once opened, if kept in the sealed tub at room temperature.

Storage

This product must be stored clear of the ground, under dry conditions, out of direct sunlight. Protect from frost.

Health & Safety Advice

Pavestone Pointfix is classified as non-hazardous. However, always wear protective gloves and eye protection.

The relevant Material Safety Data Sheet can be obtained from www.pavestone.co.uk or directly from Pavestone UK Limited at the address below.



WARNING



Watch our 'How To' mix & apply Pointfix video. Click on the Play button!